

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number  
WO 03/074387 A1(51) International Patent Classification<sup>7</sup>: B65D 81/05

(21) International Application Number: PCT/GB03/00881

(22) International Filing Date: 3 March 2003 (03.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0204963.3 2 March 2002 (02.03.2002) GB

(71) Applicant and


(72) Inventor: DURRANT, Sam [GB/GB]; 114 Oak Street,  
Norwich, Norfolk NR3 3BP (GB).(74) Agent: I.P.21 LIMITED; Norwich Research Park, Col-  
ney, Norwich NR4 7UT (GB).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CORNER PROTECTORS

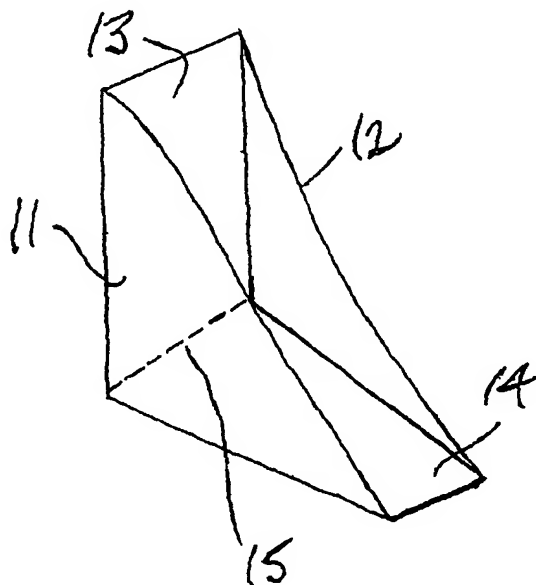

(57) Abstract: A corner protector has a pair of opposite frame-embracing faces which are resilient and bowed so that, in use, the corner region of a frame to be protected must force its way into position between the opposite faces of the protector and will thereafter be frictionally gripped between them until the protector is subsequently released by pulling it off against the frictional resistance. Frame-gripping ribs may be incorporated on the major faces of the protector and in addition the protector may be tapered outwardly from its apex to its open mouth to provide a lead for insertion of the frame. To provide a still greater lead, the open edges of the protector may each be given a slight flange extension, but at opposite ends of the two edges.

WO 03/074387 A1